

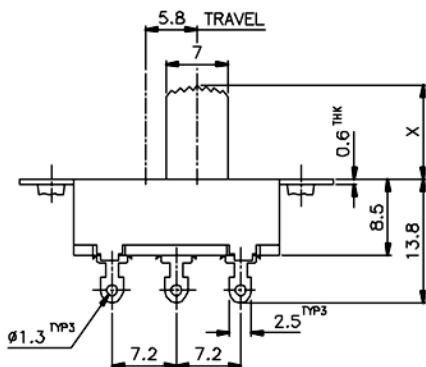


SCHMATIC

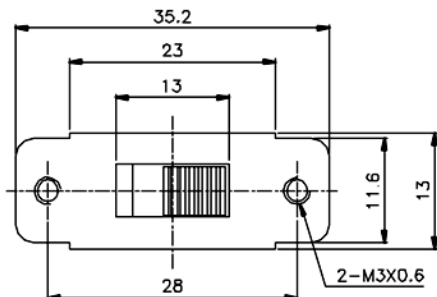

X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH	
	RATING: DC 50V 0.5A	MODEL NO: SS-22L03-G	
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: mm	DWN
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE: 2 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 500V for 1 min	TOLERANCE: ±0.2	APPD.
	OPERATION FORCE: 450±150g		
	SWITCHING LIFE: 10000Cycles(6-10c/m loading)		
BY:	PROMOTIVE INDUSTRIAL CO., LTD. HONG KONG	DRWG NO:	
DATE:		B 800607-00	